

Teh-Plast[®] Group

Quality and Trust



- Glass Machines
- PVC and Aluminium Machines
- Alubond Machine
- Pipe Bending & Embossing Machines
- Wood Working Machines
- Other Machines

- *Mašine za staklo*
- *PVC i aluminijumske mašine*
- *Formatizeri za aluminijum i drvo*
- *Mašine za savijanje cevi i kovano gvožđe*
- *Mašine za obradu drveta*
- *Druge mašine*

“ For Any Machine Just Call ”



+90 543 504 33 27



+389 77 699 785



“ Za svaku mašinu samo pozovite ”



+381 61 23 56 914



+381 60 14 14 819

Automatic Double Head Cutting Machine 500 mm Automatski dvoglavi ger 500 mm



Touch Display

Weight Težina	1000 kg	Total Power Ukupna snaga	4.5 kW
Lenght Dužina	5000 mm	Control System Sistem upravljanja	Microcomputer
Width Širina	1200 mm	Saw Diametar Sav Diametar	500 mm
Height Visina	1500 mm	Max. Profile Height Maks. Visina profila	155 mm
Air Pressure Pritisak vazduha	6-8 Bar	Max. Profile Width Maks. Širina profila	165 mm
Air Consumption Potrošnja vazduha	80 l/min.	Voltage & Frequency Napon i frekvencija	380 V/A 50 Hz

Eco Double Head Corner Welding Machine Eko Dvoglava varilica sa 0.2 mm nožem



Weight Težina	500 kg	Air Consumption Potrošnja vazduha	60 l/min.
Lenght Dužina	4200 mm	Voltage & Frequency Napon i frekvencija	220 V/A 50 Hz
Width Širina	700 mm	Total Power Ukupna snaga	2 x 2.10 kW
Height Visina	1500 mm	Control System Sistem upravljanja	Microcomputer
Air Pressure Pritisak vazduha	6-8 Bar	Max. Profile Height Maks. Visina profila	140 mm

Automatic Corner Cleaning Machine Automatska čistilica



Weight Težina	200 kg
Lenght Dužina	980 mm
Width Širina	700 mm
Height Visina	1450 mm
Air Pressure Pritisak vazduha	6-8 Bar
Air Consumption Potrošnja vazduha	60 l/min.
Voltage & Frequency Napon i frekvencija	380 V/A 50 Hz
Total Power Ukupna snaga	1.10 kW
Control System Sistem upravljanja	Microcomputer
Cycle Ciklus	3000 rpm
Blade Axle BladeAkle	32 mm

Automatic Triple Drilling + Copy Router Automatski pantograf/kopirka



Weight Težina	95 kg
Lenght Dužina	900 mm
Width Širina	600 mm
Height Visina	1500 mm
Air Pressure Pritisak vazduha	6-8 Bar
Air Consumption Potrošnja vazduha	9 l/min.
Voltage & Frequency Napon i frekvencija	380 V/A 50 Hz
Total Power Ukupna snaga	Total Power
Control System Sistem upravljanja	Electropneumatic

Automatic End Milling Machine Automatska T-prečka sa dva glodala




Weight Težina	105 kg
Lenght Dužina	500 mm
Width Širina	750 mm
Height Visina	1100 mm
Air Pressure Pritisak vazduha	6-8 Bar
Air Consumption Potrošnja vazduha	9 l/min.
Voltage & Frequency Napon i frekvencija	380 V/A 50 Hz
Total Power Ukupna snaga	1.1 kW
Control System Sistem upravljanja	Electropneumatic

Automatic Glazing Bead Cutting Machine Automatska mašina za sečenje lajsni



Weight Težina	113 kg
Lenght Dužina	1250 mm
Width Širina	550 mm
Height Visina	1150 mm
Air Pressure Pritisak vazduha	6-8 Bar
Air Consumption Potrošnja vazduha	12 l/min.
Voltage & Frequency Napon i frekvencija	380 V/A 50 Hz
Total Power Ukupna snaga	2x0.75 kW
Control System Sistem upravljanja	Electropneumatic
Cycle Ciklus	3000 rpm
Length of the table Dužina stola	1 x 2 m

Automatic Single Head Cutting Machine Jednoglavi ger sa testerom odozdo

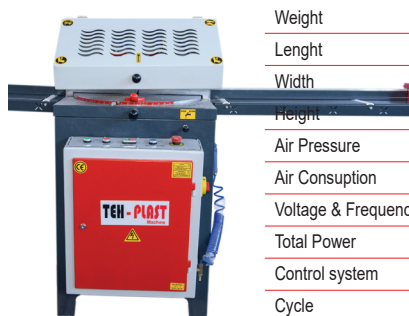

Weight Težina	107 kg
Lenght Dužina	750 mm
Width Širina	650 mm
Height Visina	1200 mm
Air Pressure Pritisak vazduha	6-8 Bar
Air Consumption Potrošnja vazduha	12 l/min.
Voltage & Frequency Napon i frekvencija	380 V/A 50 Hz
Total Power Ukupna snaga	1.5 kW
Control system Sistem upravljanja	Electropneumatic
Cycle Ciklus	3000 rpm

Single Head Welding Machine with 0.2 mm Blade Jednoglava varilica sa 0.2 mm nožem



Weight Težina	145 kg
Lenght Dužina	630 mm
Width Širina	700 mm
Height Visina	1400 mm
Air Pressure Pritisak vazduha	6-8 Bar
Air Consumption Potrošnja vazduha	41 l/min.
Voltage & Frequency Napon i frekvencija	220 V/A 50 Hz
Total Power Ukupna snaga	2.10 kW
Control System Sistem upravljanja	Microcomputer
Welding Angle Ugao zavarivanja	25-180

Professional Double Head Corner Welding Machine

Profi Dvoglava varilica sa 0.2 mm nožem



Weight	Težina	700 kg
Lenght	Dužina	4300 mm
Width	Širina	1360 mm
Height	Visina	1750 mm
Air Pressure	Pritisak vazduha	6-8 Bar
Air Consumption	Potrošnja vazduha	70 l/min.
Voltage & Frequency	Napon i frekvencija	380 V/A 50 Hz
Total Power	Ukupna snaga	4.50 kW
Control System	Sistem upravljanja	HMI Touch pad
Max. Profile Height	Maks. Visina profila	160 mm

Manual Top Cutting Machine

Manuelna testera za sečenje



Weight	Težina	110 kg
Lenght	Dužina	700 mm
Width	Širina	700 mm
Height	Visina	1400 mm
Air Pressure	Pritisak vazduha	6-8 Bar
Air Consumption	Potrošnja vazduha	6 l/min.
Voltage & Frequency	Napon i frekvencija	380 V/A 50 Hz
Total Power	Ukupna snaga	2.20 kW
Control System	Sistem upravljanja	Electropneumatic
Cycle	Ciklus	3000 rpm

Automatic Double Head Cutting Machine Servo Angled

Automatski dvoglavi ger sa 3 servo motora



Weight	1500 kg	Total Power	10 kW
Težina		Ukupna snaga	
Lenght	7100 mm	Control System	Microcomputer
Dužina		Sistem upravljanja	
Width	1900 mm	Saw Diametar	600 mm
Širina		Sav Diametar	
Height	1700 mm	Max. Profile Height	220 mm
Visina		Maks. Visina profila	
Air Pressure	6-8 Bar	Max. Profile Width	229 mm
Pritisak vazduha		Maks. Širina profila	
Air Consumption	200 l/min.	Voltage & Frequency	380 V/A 50 Hz
Potrošnja vazduha		Napon i frekvencija	

CNC Corner Cleaning Machine CN-11

CNC čištilica CN-11



Weight	Težina	1050 kg
Lenght	Dužina	1200 mm
Width	Širina	1900 mm
Height	Visina	2000 mm
Air Pressure	Pritisak vazduha	6-8 Bar
Air Consumption	Potrošnja vazduha	94 l/min.
Voltage & Frequency	Napon i frekvencija	380 V/A 50 Hz
Total Power	Ukupna snaga	7 kW
Control System	Sistem upravljanja	HMI Touch pad
Max. Profile Height	Maks. Visina profila	200 mm
Max. Profile Width	Maks. Širina profila	130 mm
Saw Diameter	Prečnik pile	250 mm
Min. Frame Inner Size	Min. Unutrašnja veličina okvira	400 x 400

Glass Setting Table

Sto za postavljanje stakla



Weight	Težina	400 kg
Lenght	Dužina	3030 mm
Width	Širina	1040 mm
Height	Visina	2020 mm
Air Pressure	Pritisak vazduha	6-8 Bar
Air Consumption	Potrošnja vazduha	50 l/min.
Min.-Max. Frame Height	Min.-Maks. Visina okvira	400-2000 mm
Max. Frame Length	Maks. Dužina okvira	2400 mm
Max. Frame Weight	Maks. Težina rama	120 kg

Window Assembling Table

Sto za okivanje prozora



Weight	Težina	560 kg
Lenght	Dužina	3100 mm
Width	Širina	2000 mm
Height	Visina - 2150 mm	2150 mm
Air Pressure	Pritisak vazduha	6-8 Bar
Air Consumption	Potrošnja vazduha	100 l/min.
Voltage & Frequency	Napon i frekvencija	380 V/A 50 Hz
Total Power	Ukupna snaga	1.10 kW
Screw Dimensions	Dimenzije vijka	3.9-4.2x16-38 mm

CNC Espagnolette Lock - Barel Opening Machine

CNC pantograf za obradu PVC i ALU profila



Weight	Težina	750 kg
Lenght	Dužina	2800 mm
Width	Širina	100 mm
Height	Visina	1250 mm
Voltage	Napon	380V / 50Hz
Total Power	Ukupna snaga	7 kW
Cycle	Ciklus	18,000 rd/d

Automatic Screwing Machine

Automatska šrafilica



Weight	Težina	110 kg
Lenght	Dužina	700 mm
Width	Širina	2000 mm
Height	Visina	1860 mm
Air Pressure	Pritisak vazduha	6-8 Bar/min.
Air Consumption	Potrošnja vazduha	1.6 l/min.
Screwing Speed	Brzina zavrtnja	1.7 sec/piece

Moldless Glazing Bead Cutting Machine with Digital Conveyor and Bluetooth


Mašina za sečenje lajsni bez šablone sa digitalnim meračem i blututom



Weight	Težina	120 kg
Lenght	Dužina	3000 mm
Width	Širina	500 mm
Height	Visina	1000 mm
Voltage & Frequency	Napon i frekvencija	380 V/A 50 Hz
Total Power	Ukupna snaga	3 kW
Control System	Sistem upravljanja	Microcomputer

Processing Center Line For PVC Windows


Linija za obradu PVC prozora

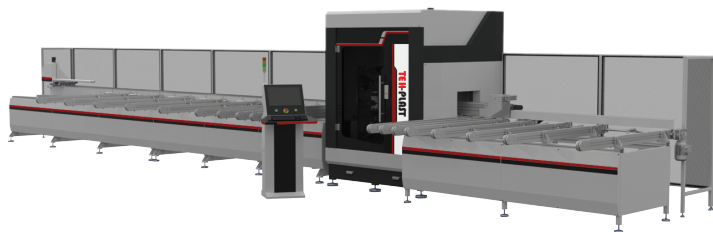

Electrical details Napón	380V, 3L-N-PE, 50-60Hz, 15kW
Air Pressure Pritisak Vazduha	6-8 Bar
Saw dimensions Dimenzija Testera	D: 550mm, d: 30mm, s: 4.2mm, z: 120
Profile cutting dimensions Dimenzija Rezanja Profila	Min: 350mm, Max: 7000mm
Maximum profile lenght Maksimalna Dužina profila	7000 mm
Machines dimensions Dimenzija Linije	H: 2450mm, L: 13650mm, W: 2650mm
Profile dimensions Dimenzije Profila	B min: 30mm, B max: 130mm, A min: 35mm, A max: 160mm
Profile slot number Broj Profila Koja Može se Postaviti	10

Four Head Welding And CNC Cleaning Line

Linija sa četvoroglavom varilicom i CNC čistilicom

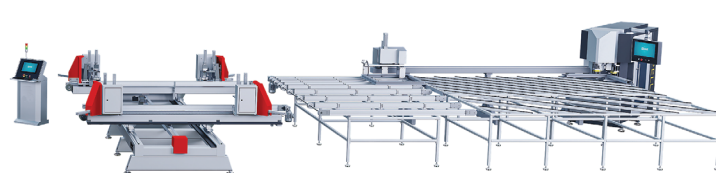

Electrical details Napón	380V, 3L-N-PE, 50-60Hz, 14kW
Air Pressure Pritisak Vazduha	6-8 Bar
Mahine weight Težina	3700 kg
Machines dimensions Dimenzija Linije	H: 2200mm, L: 13000mm, W: 6000mm
Profile dimensions Dimenzija Profila	B min: 40mm, B max: 150mm, A max: 130mm
Welding dimensions Dimenzije Varenja	A min(mm) - B min (mm): 400x400, A max(mm): 3600, B max(mm): 2600

Automatic Double Head Screwing Machine for PC

Automatska dvoglava šrafilica za obradni centar



Weight Težina	1500 kg	Voltage & Frequency Napón i frekvencija	380 V/A 50 Hz
Lenght Dužina	5700 mm	Total Power Ukupna snaga	5 kW
Width Širina	4000 mm	Control System Sistem upravljanja	PLC
Height Visina	1900 mm	Min-Max.Profile Height Min.-Maks. Visina profila	30-180 mm
Air Pressure Pritisak vazduha	6-8 Bar	Min-Max. Profile Width Maks. Širina profila	40-140 mm
Air Consuption Potrošnja vazduha	200 l/min.	Min.-Max. Profile Lenght Min.-Max. Dužina profila	350-4600 mm

CNC Double Head Screwing Machine

CNC Dvoglava šrafilica



Weight Težina	260 kg
Lenght Dužina	4800 mm
Width Širina	1250 mm
Height Visina	2000 mm
Power Snaga	0.37 kW
Air Pressure Pritisak vazduha	6-8 Bar
Voltage & Frequency Napón i frekvencija	380 V/A 50 Hz

Hydraulic Aluminium Corner Crimping Machine

Hidraulična štipaljka za aluminijumske profile



Weight Težina	385 kg
Lenght Dužina	1100 mm
Width Širina	850 mm
Height Visina	1200 mm
Force Snaga	7000 kg
Air Pressure Pritisak vazduha	7 Bar
Voltage & Frequency Napón i frekvencija	380 V/A 50 Hz
Total Power Ukupna snaga	2.0 kW

Machines for Cutting Support Sheet Mašine za sečenje ojačanja



Machine For Cutting Support Sheet - 400 mm

Mašina za sečenje ojačanja 400 mm

Weight Težina	100 kg	Stone diameter Prečnik kamena	175 x 20 x 20mm
Voltage & Frequency Napón i frekvencija	380 V / 50 Hz	Saw diameter Prečnik testere	400 x 40 x 3mm
Motor power Snaga motora	3 kW / 4 HP	Cable Kabl	4 x 1.5
Cycle Ciklus	2800 rpm	Shaft Osovina	20 mm

Sheet Cutting Machine With Emulsion


Mašina za sečenje ojačanja sa emulzijom



Weight Težina	190 kg
Length Dužina	1200 mm
Width Širina	700 mm
Height Visina	1350 mm
Voltage and Frequency Napón i frekvencija	380 V / A 50 Hz
Total Power Ukupna snaga	3.40 kW
Saw diameter Prečnik testere	315 mm
Shaft Osovina	32 mm

Hydraulic Support Sheet Cutting Machine

Hidraulična mašina za sečenje ojačanja

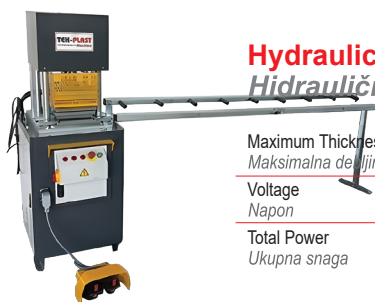

Maximum Thickness for Cutting Maksimalna debljina sečenja	2mm	Hydraulic System Hidraulični sistem	120 Bar (10Ton)
Voltage Napón	380V	Tank Capacity Kapacitet rezervoara	18 Liter
Total Power Ukupna snaga	2.2KW		

Economical Glass Washing Machine

Ekonomična mašina za pranje stakla



Washable glass thickness Staklo za pranje debljine	2-12mm	Weight Težina	700 - 1200 kg
Glass washing speed Brzina pranja stakla	1-10m/min.	Min.-Max. Washable glass size Min.-Maks Veličina stakla za pranje	170x350 2500x5000 mm
Width Širina	1500 mm	Voltage & Frequency Napon & Frekvencija	380 V - 50 Hz
Lenght Dužina	5500-6000 mm	Total Power Ukupna snaga	11-16 kW
Height Visina	2200-3400 mm		

Pneumatic Panel Press Line

Pneumatska panel pres linija



Washable glass thickness Staklo za pranje debljine	2-12mm	Weight Težina	2500-3500 kg
Glass washing speed Brzina pranja stakla	1-15m/min.	Min.-Max. Washable glass size Min.-Maks Veličina stakla za pranje	170x350 2500x6000 mm
Width Širina	2000 mm	Min.-Max. Pressable glass size Min.-Maks Dimenzije stakla pod presom	170x350 2500x2750 mm
Lenght Dužina	18000 mm	Voltage & Frequency Napon & Frekvencija	380 V - 50 Hz
Height Visina	2700-3400 mm	Total Power Ukupna snaga	20-33 kW
Air Consumption Potrošnja vazduha	150 L/min	Air Pressure Pritisak vazduha	6 Bar

Thiokol & Polyurethane & Silicone Extruder

Thiokol & Poliuretanski & Silikonski ekstruder



Voltage	Napon	380 V
Frequency	Frekvencija	50 Hz
Power	Snaga	5 kW
Air Pressure	Pritisak vazduha	6 Bar
Air Consuption	Potrošnja vazduha	50 L/min.
Lenght	Dužina	1500 mm
Width	Širina	1500 mm
Height	Visina	2500 mm
Weight	Težina	720 kg

Butyl Extruder

Butil ekstruder



Voltage & Frequency	Napon & Frekvencija	380 V - 50 Hz
Total Power	Ukupna snaga	5 kW
Air Pressure	Pritisak vazduha	6 Bar
Air Consuption	Potrošnja vazduha	10 L/min.
Width	Širina	700 mm
Lenght	Dužina	3000 mm
Height	Visina	1050 mm
Weight	Težina	480 kg
Tank Capacity	Nosivost rezervoara	7 kg
Proces.Profile Lenght	Procesna duž. profila	6-20 mm

Professional Glass Washing Machine

Profesionalna mašina za pranje stakla



Washable glass thickness Staklo za pranje debljine	2-12mm	Weight Težina	800 - 1500 kg
Glass washing speed Brzina pranja stakla	1-15m/min.	Min.-Max. Washable glass size Min.-Maks Veličina stakla za pranje	170x350 2500x5000 mm
Width Širina	2000 mm	Voltage & Frequency Napon & Frekvencija	380 V - 50 Hz
Lenght Dužina	8000-8500 mm	Total Power Ukupna snaga	13-23 kW
Height Visina	2200-3400 mm		

Automatic Sealing Robot

Automatski robot za zalivanje



Min.-Max. Glass Dimensions Min.-Maks Dimenzije stakla	400X400-2500X3210 mm	Thiokol Extrusion Thickness Debljina ekstruzije Thiokol	6-24 mm
Glass Thickness Debljina stakla	3-12 mm	Thiokol Extrusion Depth Dubina ekstruzije Thiokol	2-15 mm
Thermo Glass Thickness Debljina termo stakla	12-50 mm	Conveyor Speed Brzina transportera	5-35 m/min
Thiokol Extrusion speed Thiokol brzina ekstruzije	5-35 m/min	Power Snaga	15 KW

Hotmelt Extruder

Hotmelt ekstruder



Material Tank Capacity	Nosivost materijala	50 kg
Voltage	Napon	380 V
Frequency	Frekvencija	50 Hz
Total Power	Ukupna snaga	10 kW
Width	Širina	900 mm
Lenght	Dužina	900 mm
Height	Visina	1445 mm
Weight	Težina	300 kg


Cooler - Freezer

Zamrzivač




Voltage	Napon	220V
Frequency	Frekvencija	50 Hz
Total Power	Ukupna snaga	1 kW
Width	Širina	610 mm
Lenght	Dužina	810 mm
Height	Visina	1210 mm
Weight	Težina	140 kg
Min.working temp.	Min. radna temp.	- 40 C degree
Max.working temp.	Maks. radna temp.	+ 40 C degree

CNC Glass Cutting Line CNC linija za sečenje stakla

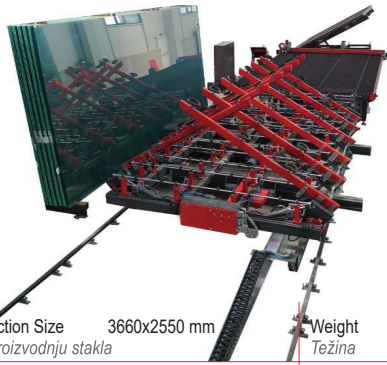

Max. Glass Production Size Maks. Staklo za proizvodnju stakla	3660x2550 mm	Weight Težina	8500 kg
Processable Glass Thickness Debljina stakla za obradivanje	3-19 mm	Voltage & Frequency Napon & Frekvencija	380 V - 50 Hz
Cutting Speed Brzina sečenja stakla	120-150 m/min adjustable	Total Power Ukupna snaga	25 kW
Low-e Grinding Speed Brza brzina brušenja	40 m/min.	Air Pressure Pritisak vazduha	6 Bar
Cutting Tolerance Tolerancija sečenja	+/- 0.2 mm	Air Consumption Potrošnja vazduha	150 l/min.
Width - Lenght - Height Širina - Dužina - Visina	W: 5400 mm L: 16000 mm H: 980 mm		

Glass Loading Machine Mašina za preuzimanje stakla

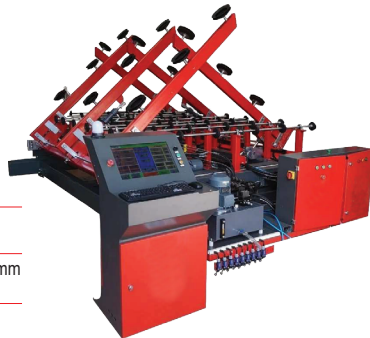

Total Power Ukupna snaga	7 kW
Air Pressure Pritisak vazduha	6 Bar
Width - Lenght - Height Širina - Dužina - Visina	W: 5400 mm L: 8000 mm H: 980 mm
Weight Težina	2800 kg

Specifications / Specifikacije

Operator adjusted parameters according to the glass feature
According to glass size, automatic suction closure control
Adjustable hydraulic and mechanical speed control
Lighted and audible error notice warning system
Control of the arm to the glass approach

Parametri podešeni od strane operatera prema funkciji stakla
Prema veličini stakla, automatska kontrola zatvaranja usisavanjem
Podesiva hidraulička i mehanička kontrola brzine
Osvetljeni i zvučni sistem za upozorenje o grešci
Kontrola ruke prema prilazu staklu

Automatic Laminated Glass Cutting Machine Automatska mašina za sečenje laminiranog stakla



Cutting Speed Brzina sečenja	60 m/min.	The capacity of lubrication tank Ukupna težina	5 L
Cutting tolerance Tolerancija sečenja	+/- 0.5mm	Total weight Potrošnja vazduha	3500 kg
Cutttable glass thickness max Debljina stakla za rezanje max	6+6+4,56 PUB	Air consumption Paralelizam	50 L/min.
Size of machine Veličina mašine	4500x5800 mm	Parallelism Snaga	1 mm
Working Height Maks. Dužina stakla	945 mm	Power Radna visina	20 kW
Max. Length of glass Min. Dužina stakla - 200 mm	4000 mm	Diagonal cutting Dijagonalno sečenje	Laser
Min. Length of glass Kapacitet rezervoara za podmazivanje	200 mm	Voltage & Frekans Napon & Frekvencija	380 V - 50Hz

CNC Glass Cutting Table CNC sto za rezanje stakla



Max. Glass Production Size Maks. Staklo za proizvodnju stakla	3660x2550 mm	Weight Težina	5800 kg
Processable Glass Thickness Debljina stakla za obradivanje	3-19 mm	Voltage & Frequency Napon & Frekvencija	380 V - 50 Hz
Cutting Speed Brzina sečenja stakla	120-150 m/min adjustable	Total Power Ukupna snaga	16 kW
Low-e Grinding Speed Brza brzina brušenja	40 m/min.	Air Pressure Pritisak vazduha	6 Bar
Cutting Tolerance Tolerancija sečenja	+/- 0.2 mm	Air Consumption Potrošnja vazduha	30 l/min.
Width - Lenght - Height Širina - Dužina - Visina	W: 4500 mm L: 3700 mm H: 980 mm		

Automatic Spacer Bending Machine Automatska mašina za savijanje lajsni



Min.-Max Processable profile length Min.-Maks Procesorna dužina	250x250mm 2500x2500mm	Total Power Ukupna snaga	4 kW
Processable Profile Thickness Procesna debljina profila	6-24 mm	Width-Lenght-Height Širina - Dužina - Visina	W: 2000mm L: 10200mm H: 2600mm
Min. Profile Thickness Min. Debljina profila	0.3 mm	Weight Težina	1650kg
Cutting Length Dužina sečenja	250-4000 mm	Voltage & Frequency Napon & Frekvencija	380V - 50 Hz
Min. Bending Angle Min. Ugao savijanja	60o	Air pressure Pritisak vazduha	6 Bar
Min. Bending Tolerance Min. Tolerancija savijanja	+/- 0.3mm	Air consumption Potrošnja vazduha	50 L/min

Automatic Desiccant Filling Machine Automatska mašina za punjenje silikagela



Barrel Volume	Zapremina bačve	80 L
Desiccant type	Sušenje tipa	0.5 - 0.8 mm
Min.Applicable profile length	Min.Primenljiva dužina profila	250x250 mm
Max.Applicable profile length	Maks.Primenljiva dužina profila	2500x2500 mm
Applicable profile thickness	Primjenljiva debljina profila	6-24 mm
Width	Širina	2000 mm
Lenght	Dužina	1020 mm
Height	Visina	2600 mm
Weight	Težina	350 kg
Voltage & Frequency	Napon & Frekvencija	380V - 50 Hz
Total Power	Ukupna snaga	4 kW
Air pressure	Pritisak vazduha	6 Bar
Air consumption	Potrošnja vazduha	100 l/min.

Semi-Automatic Laminated Glass Cutting Machine

Poluautomatska mašina za sečenje laminiranog stakla



Voltage Napon	380 V	Cutting Speed Brzina sečenja	60 m/min.
Total Power Ukupna snaga	8 kW	Weight Težina	1.100 kg (for 3300 mm)

Specifications / Specifikacije

At the same time cuts the laminated glass, from bottom and from the top.

After the finishing of cutting operation, automatically brakes the glass first starting from top and after from the bottom.

All mechanical parts can be manually controlled from PLC screen.

Conveyor is asynchronous motor controlled.

U isto vreme seče laminirano staklo, odozdo i odozgo.

Nakon završetka procesa sečenja, staklo automatski


koči prvo počevši od vrha, a zatim odozdo.

Svi mehanički delovi se mogu ručno upravljati sa PLC ekrana.

Transport je upravljani asinhronim motorom.

Automatic Argon Gas Filling Machine

Automatska mašina za punjenje argon gasom



Voltage	Napon	230 V
Frequency	Frekvencija	60 Hz
Total Power	Ukupna snaga	0.75 kW
Weight	Težina	30 kg
Width	Širina	500 mm
Lenght	Dužina	950 mm
Height	Visina	110 mm

Manual Glass Cutting Table With T-Ruler

Manuelni sto za rezanje stakla sa T-lenjirima



Air Pressure	Pritisak vazduha	6 Bar
Air Consumption	Potrošnja vazduha	24 L/min.
Power	Snaga	4 kW
Voltage	Napon	380V
Frequency	Frekvencija	50 Hz
Width	Širina	2000 mm/2250 mm/2500 mm
Lenght	Dužina	3000 mm/3300 mm/3800 mm
Height	Visina	800 mm
Weight	Težina	400 kg

Rotating Stand


Rotirajuće postolje



Voltage	Napon	220V
Frequency	Frekvencija	50 Hz
Total Power	Ukupna snaga	0.25 kW
Air Pressure	Pritisak vazduha	6 Bar.
Air Consumption	Potrošnja vazduha	5 L/min.
Width	Širina	450 mm
Lenght	Dužina	710 mm
Height	Visina	1200 mm
Weight	Težina	100 kg

Glass Tempering Line

Linija za kaljenje stakla

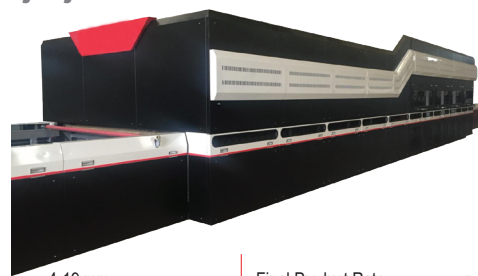

Glass Thickness Debljina stakla	4-19 mm	Final Product Rate Stopa konačnog proizvoda	not more than 98%
Min. Glass dimension Min. Dimenzije stakla	100x300 mm	Glass quality Uniformity Kvalitet stakla Uniformnost	0.2%
Max. Glass dimension Maks. Dimenzije stakla	2440x1830 mm - 4 mm 2440x3660 mm - 5-19 mm	Power Consumption Potrošnja energije	3.8 kWh m2-5 mm

Eva Laminated Furnace

Peč za laminiranje stakla EVA

Glass dimension Dimenzije stakla	1500x1500 mm 1600x3000 mm 2000x3000 mm
Number of shelves Broj polica	5 5 4
Voltage Napon	380 V
Power Snaga	16 kW 26 kW 30 kW
Weight Težina	500 kg 1500 kg 3500 kg



Desicant Filling Machine


Mašina za punjenje silikagela



Material tank capacity	Kapacitet rezervoara za materijal	25 kg
Voltage	Napon	220V
Frequency	Frekvencija	50 Hz
Total Power	Ukupna snaga	0.18 kW
Air Pressure	Pritisak vazduha	2 Bar
Width	Širina	390 mm
Lenght	Dužina	2450 mm
Height	Visina	1650 mm
Weight	Težina	80 kg


Semi-Automatic Profile Cutting Machine

Poluautomatska mašina za sečenje lajsne



Min.Cutttable profile length	Min.Dužina profila za sečenje	160 mm
Max.Cutttable profile length	Maks.Dužina profila za sečenje	2750 mm
Total Power	Ukupna snaga	0.5 kW
Width	Širina	450 mm
Lenght	Dužina	600 mm
Height	Visina	800 mm
Weight	Težina	300 kg
Voltage	Napon	380V
Frequency	Frekvencija	50 Hz

CNC Glass Processing Centar with 3 or 4 Axis CNC obradni centar za staklo sa 3 ili 4 ose

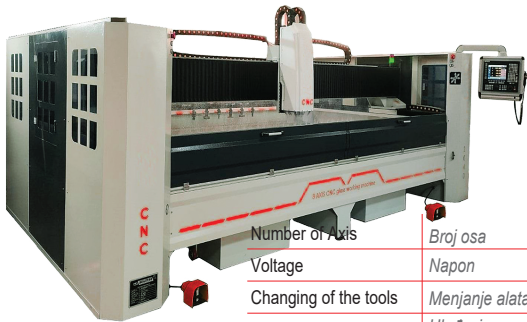

Number of Axis	Broj osa	3 or 4
Voltage	Napon	380 V
Changing of the tools	Menjanje alata	Automatic
Cooling	Hlađenje	air
Cycle	Ciklus	12000 rpm
Power	Snaga	12 kW
Working Dimensions (LxWxH)	Radne dimenzije (DxŠxV)	1200-2400-400 1500-2500-400 1500-3000-400 2000-4000-400
Weight	Težina	5000 kg

Machine For Cleaning Two Component Extruder Mašina za čišćenje tiokol ekstrudera



By using special chemical fluid mixture and high pressure cleans mixture in the central, joint parts, mixer and pistol. After cleaning the mixer part by providing closed-loop purification for 3 minutes, purifies all parts of Thiokol Bonding, Polyurethane in the system.

Korišćenjem specijalne smeše hemijskih tečnosti i visokim pritiskom čisti smešu u centralnim, zglobnim delovima, mikserom i pištoljem. Nakon čišćenja dela miksera ezbeđivanjem čišćenja u zatvorenom krugu u trajanju od 3 minuta, pročišćavaju se svi delovi Thiokol lepljenja, poliuretana u sistemu gde se omogućava dugotrajno korišćenje mašine.

Manual Grinding And Drilling Machine Manuelna mašina za brušenje i bušenje




Grinding axis	Os brušenja	22 mm
Max. outer diameter of grinding	Maks. spoljni prečnik brušenja	250 mm
Max. glass thickness for grinding	Maks. debljina stakla za brušenje	10 mm
Max. glass thickness for drilling	Maks. debljina stakla za bušenje	65 mm
Voltage & Frequency	Napon & Frekvencija	220 V - 50 Hz
Total Power	Ukupna snaga	1.5 kW
Width-Lenght-Height	Širina-Dužina-Visina	800mm/1200mm/900mm
Weight	Težina	150 kg

Horizontal Washing Machine Horizontalna mašina za pranje stakla



Number of Brushes Broj četke	6	Width Širina	2600-3500 mm
Min.-Max. Washable glass size Min.-Maks. Staklo za pranje Veličina	400x400 mm 1600/2000/2500x3000 mm	Lenght Dužina	5700 mm
Glass washing speed Brzina pranja stakla	3 - 10 m/min.	Height Visina	2500 mm
Glass Thickness Debljina stakla	3-12 mm	Weight Težina	1500 kg
Voltage & Frequency Napon & Frekvencija	380 V - 50 Hz	Total Power Ukupna snaga	25 - 30 kW

Press Table 2x2 Pres tabla 2x2

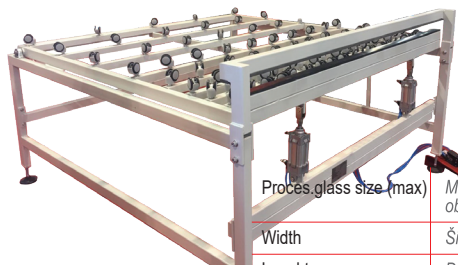

Process glass size (max)	Maks. Staklo za obrađivanje	2000x2000mm
Width	Širina	2400 mm
Lenght	Dužina	2100 mm
Height	Visina	950 mm
Weight	Težina	150 kg
Air pressure	Pritisak vazduha	2 Bar
Air consumption	Potrošnja vazduha	20 L/min

Double Head Glass Drilling Machine Dvoglava mašina za bušenje stakla



Distance from C	Udaljenost od C	1100 mm
Hole diameter	Prečnik otvora	5-80 mm
Glass thickness	Debljina stakla	3-19 mm
Air Pressure	Pritisak vazduha	8 Bar
Air Consumption	Potrošnja vazduha	6 l/min.
Power	Snaga	2 kW
Width	Širina	2200 mm
Lenght	Dužina	2000 mm
Height	Visina	1600 mm
Weight	Težina	600 kg

Horizontal Double Edging Machine Dvoglava horizontalna mašina za brušenje stakla



Min. Glass size	Min. Veličina stakla	300x300 mm
Glass Thickness	Debljina stakla	3-25 mm
Working Speed	Radna brzina	0.5-5 m / min.
Air Pressure	Pritisak vazduha	6 Bar
Air Consumption	Potrošnja vazduha	1 lt / min.
Total Power	Ukupna snaga	46 - 50 kW
Width	Dužina	3000 - 3800 mm
Lenght	Širina	4000 mm
Height	Visina	1800 mm
Weight	Težina	4000 - 5600 kg

Shape Edging Machine Mašina za obradu oblika



Cross glass diameter	Prečnik stakla	100-2000 mm
Min. Internal Depth	Min. Unutrašnja dubina	0 and 100 mm
Bevel Angle	Bevel Angle	0-30°
Max. Bevel Width	Maks. Širina nagiba	40 mm
Max. Glass Thickness	Maks. Debljina stakla	20 mm and 25 mm
Total Power	Ukupna snaga	2.6 kW and 2.8 kW
Width-Lenght-Height	Širina-Dužina-Visina	1200 mm/1200 mm/1600 mm
Weight	Težina	800 kg

Double Cross Belt Machine Mašina za dvostrano brušenje



Table	Stol	800x1200 mm
Voltage	Napon	380 V
Frequency	Frekvencija	50 Hz
Total Power	Ukupna snaga	4.4 kW
Width	Širina	960 mm
Lenght	Dužina	1300 mm
Height	Visina	1950 mm
Weight	Težina	300 kg

Vertical Sand Blasting Machine
Vertikalna mašina za peskiranje stakla



1400 mm - 1600 mm - 1800 mm working height
Fan system preventing dust from out of the machine
1 special designed gun

Option
Automatic sandblasting with digital display
Additional guns

1400 mm - 1600 mm - 1800 mm radna visina
Sistem ventilatora koji sprečava da prašina izađe iz mašine
1 specijalno dizajnirani pištolj

OPCIJA
Automatsko peskiranje sa digitalnim ekranom
Dodatne puške

Horizontal Sand Blasting Machine
Horizontalna mašina za peskiranje stakla



1200 mm - 1700 mm working width
Digital speed adjustable sand carrier system
Radius camber glass sandblasting
4 specially designed guns (Boron carbide)
Compressor suitable for the machine is 22 kW 10 Bar
Required air 3400 liters 7 Bar/min.
Electric power 4 kW

1200 mm - 1700 mm radne širine
Digitalni sistem nosača peska podesiv na brzinu
Radius peskasto staklo
4 posebno dizajnirane puške (borov karbid)
Kompresor pogodan za mašinu je 22 kW 10 Bar
Potrebni vazduh 3400 litara 7 Bar / min.
Električna snaga 4 kW

Straight Bevelling Machine
Mašina za pravljenje fazeta



Total Number of Heads Ukupno broj glava	10	Air Pressure Pritisak vazduha	6 Bar
Mini. Glass processing size Mini. Veličina obrade stakla	150x150 mm	Air Consumption Potrošnja vazduha	1 l/min.
Glass thickness Debljina stakla	3-12 mm	Voltage & Frequency Napon & Frekvencija	380 V - 50 Hz
Conveyor Speed Brzina transportera	0.7-2.8 m / min.	Power Snaga	18 kW
Max. Bizote Width Maks. Širina bizota	30 °C	Length-Width-Height Dužina-Širina-Visina	7000 mm/1000 mm/2600 mm
Angle of Bevel Ugao nagiba	0-22	Weight Težina	3800 kg

Straight Edging Machine
Vertikalna mašina za KP obradu



Total Heads Ukupno glave	9	Power Snaga	16 kW
Glass thickness Debljina stakla	3-26 mm	Length Dužina	7000 mm
Min Glass Size Min. Staklo	100x100 mm	Width Širina	1000 mm
Production Speed Proizvodna brzina	0.7-5 m / min.	Height Visina	2600 mm
Voltage & Frequency Napon & Frekvencija	380 V - 50 Hz	Weight Težina	3200 kg

Machines for Aluminium and Wooden Sizing - Mašine za alubond i drvo

Aluminium and Wooden Panel Cutting and Sizing Machine
Formatizeri za aluminijum i drvo



Motor Power Snaga motora	4hp - 3 kw	Horizontal Cutting Height Visina horizontalnog sečenja	1800 mm
Moving Panel Pomeranje ploče	Automatic	Vertical and Horizontal Cutting Length Dužina vertikalnog i horizontalnog sečenja	4000 mm
Electrical Connection Napon i frekvencija	3x 380V / 50 Hz	Cutting Blade Dimensions Dimenzije sečiva za rezanje	200 x 30 x 3.2 trapez
Cutting Blade Cycle Brzina sečenja sečiva	3000 rpm	Channel Blade Dimensions Dimenzije sečiva kanala	200 x 30 x 3.2 trapez
Joint Blade Cycle Brzina zajedničkog sečiva	5800 rpm	Working Dimensions (LxHxW) Radne dimenzije (D x V x Š)	5000mmx2850mm 1600mm
Vertical Cutting Height Vertikalna visina košenja	2000 mm	Loading Dimensions (LxHxW) Dimenzije opterećenja (D x V x Š)	5000mmx2600mm 1600mm


CNC Router
CNC ruter



CNC Router and CNC Plasma machines are made according your desired characteristics and dimensions. Depending on the desired machine, a spindle, step or servo motor can be used, as well as MDF or vacuum polyurethane boards. With a CNC Plasma machine you can cut steel; You can work with the following materials with a CNC router: Solid wood, MDF, hardboard, plywood, chipboard, plexiglass, plastics, acrylic, polyethylene, delrin, peek, kestamide, polyamide, polycarbonate, brass, copper, aluminum, magnesium, titanium alloy, aluminum composite panels and EPS, decoro, marble, granite, carbon fiber, fiberglass and other composite materials.


CNC Ruter i CNC Plazma mašine, prave se spored vašem željenem karakteristike i dimezije. Od zavisnosti željene mašine, može se upotrebiti spindle, step ili servo motor, kao i MDF ili vakumske poliuretanske table. Sa CNC Plazma mašinom možete rezati čelik; Sa CNC ruterom možete raditi sledeće materijale: Masivno drvo, MDF, lesomit, šperploča, iverica, pleksiglas, plastike, akrilik, polietilen, delrin, peek, kestamid, poliamid, polikarbon, mesing, bakar, aluminijum, magnezijum, legura Titanioma, aluminijumske kompozitne paneke, dekota, XPS i EPS stiropora, mermer, granit, karbonfiber, fiberglass i druge kompozitne materijale.

Automatic Wooden Door Lock Boring Machine Automatski mašina za otvaranje brave i cilindre



Center Dimesion Place of Arm Switch Prekidač za srednju dimenziju mesta	75-100 mm	Working Pressure Radni pritisak	6-8 Bar
Milling Dimension of Lock Place Dimenzija glodanja mesta zaključavanja	10-250 mm	Lenght Dužina	1500 mm
Milling Dimension of Mirror Place Dimenzija glodanja ogledala	10-250 mm	Width Širina	1200 mm
Arm and Key Place Drilling Cycle Ciklus bušenja ruku i ključa	6500 rpm	Height Visina	1700 mm
Lock Place Milling Cycle Ciklus zaključavanja	9500 rpm	Packing Weight of the Machine Težina pakovanja mašine	1050 kg
Total Engine Power Ukupna snaga motora	5 kW	Machine Net Weight Neto težina mašine	960 kg

Wood Sawing Machine Formatizer za sečenje drveta

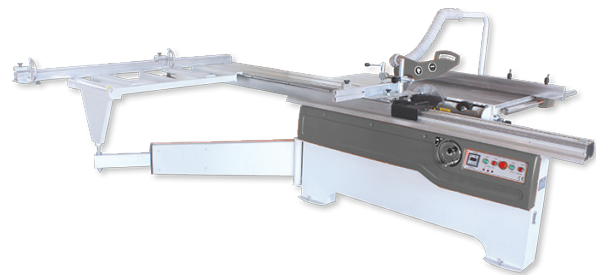

Sliding Table Klizni sto	2200mm-2800mm 3200mm-3800mm	Table Dimensions with Additional Table in the Back Tablične dimenzije sa dodatnom tablicom na poleđini	890 x 740 mm
Standart Diameter of Balde Standardni prečnik Balde	350 / 300 mm	Table Dimensions with Additional Table in the Side Dimenzije tabele sa dodatnom tablicom na strani	500 x 500 mm
Diameter of Spindle Prečnik vretena	30 mm	Profile Carriage Dimensions Nosivost profila	1220 x 640 mm
Max. Width of Cut Maks. širina reza	1300 mm	Dust Vacuuming Connection Prašina za pražnjenje	120 mm
Dimensions of Main Table Dimenzije glavnog stola	890 x 690 mm	Motor Power Snaga motora	4 HP - 3 kW (2200 mm) 5.5 HP - 4 kW others
Tilting of Blade Nagib noža	0 - 45 degree	Speed of Blade Brzina noža	3700 - 5100 rpm

Embossing Machines - Mašine za kovano gvožđe

Scroll Bending Machine Mašina za rolovano savijanje



Width Širina	700 mm
Lenght Dužina	1100 mm
Height Visina	1000 mm
Weight Težina	350 kg
Motor Motor	2.2 kW
Moulds Kalupi	5 Moulds
Max Bending Thickness Maksimalna debljina savijanja	40x10mm
Production Capacity 2.5 tonnes	Kapacitet proizvodnje 2,5 tone (8000 pieces) 8 hour

Hydraulic Press&Cutting Machine Hidraulička mašina za presovanje I rezanje



Piston Klip	120mm x 70mm
Width Širina	1630 mm
Lenght Dužina	530 mm
Height Visina	1160 mm
Weight Težina	500 kg
Motor Motor	7.5 kW
Max.Bending Thickness Maks.debljina savijanja	50mmx10mm, 25mm x 25mm (cold)
Max.Cutting Thickness Maks.debljina sečenja	40mmx10mm(cold)

Pneumatic Hammer Pneumatski čekić



Normal Falling Weight Real Težina normalnog pada	62 Kg
Forging Time Vreme klečanja	220 / minute
Max Strok Maks. Puhanje	220 mm
Motor Power Snaga motora	380 V 3 Phase – 7,5 kw
Motor Cycle Ciklus motora	1450 time in a minute
Mold Area Dimensions Dimenzija površine kalupa	150 x 78 mm
Total Weight kg Ukupna težina	1550 Kgs
Anvil Weight kg Težina nakovnja	355 Kgs
Width Širina	741 mm
Lenght Dužina	1700 mm
Height Visina	1640 mm

Circle Twisting Machine Kombinovana mašina




Width Širina	1550 mm
Lenght Dužina	650 mm
Height Visina	1250 mm
Weight Težina	550 kg
Motor Motor	4 kW / 22 rpm
Molds Kalupi	12mm; 24mm square Rib; 10cm - 12cm Ring
Maximum Twist Thickness Maksimalna debljina uvijanja	24mm
Production Capacity Kapacitet proizvodnje	4800 rings / 8 hours 960 ribs

End Forging Machine Mašina za presovanje gvožđa



Cold Thickness Debljina hladnoće	max 8mm
Hot Thickness Vruća debljina	max 12mm
Motor Motor	4 kW
Width Širina	1170 mm
Lenght Dužina	780 mm
Height Visina	1200 mm
Weight Težina	450 kg
Production Capacity Proizvodni kapacitet	12mmx6mm, 1200 pieces / 8 hours

Embossing Machine Mašina za utiskivanje



Width Motor	1250 mm
Lenght Širina	1530 mm
Height Dužina	1420 mm
Weight Visina	900 kg
Molds (Free of Charge) Težina	Clamp line 1 Set (2 molds)
Kalupi (bez nadoplate)	

PVC Profile Bending Machine Mašina za savijanje PVC profila



There are 3 types of PVC Profile Bending Machine.

- 3000 mm with Glycerine
- 5500 mm with Glycerine
- 6000 mm with Hot Air

Also, there is various profile wrapping and foil slitting machines. Please ask for details related machines which you are interested in.

Postoje 3 vrste mašina za savijanje PVC profila.

- 3000 mm sa glicerinom
- 5500 mm sa glicerinom
- 6000 mm sa vrućim vazduhom

Takođe, postoje razne mašine za zavijanje profila i rezanje folije. Molimo vas pitajte za detalje povezane mašine koje vas zanimaju.

Roll-Form Machine Mašina za savijanje metalnih profila



Depend on which type of the roll-form line is need it can be make lines accordingly. Line for producing of support sheet for PVC profiles can vary from 6 to 14 heads. Also line for production of drywall profile is available, where wall thickness, speed of machine and adding punch press feature which can change the price.

U zavisnosti koji tip linija za oblikovanje je potrebno, može se prema tome napraviti. Linija za proizvodnju ojačanje za PVC profile može varirati od 6 do 14 glava. Također na raspolaganju je linija za proizvodnju plafonske profile, gdje debljina zida, brzina mašine i dodavanje panč presu mogu promijeniti cenu.

Compressors Kompresori



Available compressor types :

- One Stage Piston Air Compressors;
- Two Stage Piston Air Compressors;
- Silent Piston Air Compressors;
- Tank Mounted Air Screw Compressors;
- Belt Pulley Drive Air Screw Compressors;
- Driven VSD Air Screw Compressors;
- Air Tanks;
- Compressed Air Dryers.

Dostupne vrste kompresora

- Jednostepeni klipni vazdušni kompresori;
- Dvostepeni klipni vazdušni kompresori;
- tihi klipni vazdušni kompresori;
- vazdušni vijaški kompresori montirani uz bocu;
- vazdušni kompresori vijačanog pogona remenice;
- VSD vazdušni vijačni kompresori;
- Boce;
- Sušaći sa komprimovanim vazduhom.

Vacuum Lifters and Cranes Vakumske dizalice i kranovi



Most common used vacuum lifter is with 4+2 suction cups. Where after the glass is caught, the suction cup does not leave the glass between 8 hours and 48 hours according to the cleaning and charging of the glass by the battery. Carrying capacity is maximum 450 kg. Manually, the glass can rotate 360 ° around its axis and lie 90 °. Operates with 12 Volt battery. Glass dimensions: 850 x 1250 to 2500 x 4000 mm. between. Machine weight: 55.3 kg. Carrying capacity of the clamp is 800 kg. Automatic locking and release mechanism are available. Maximum thickness can catch: 20 mm. Apparatus weight: 31 kg. For other vacuum lifters and clamps please ask.

Najčešći korišćeni vakumski podizač je sa 4+2 držača vakuum. Gde kada staklo uhvati, držač vakuum ne ostavlja čašu između 8 i 48 sati, u skladu sa čišćenjem i ponovnim punjenjem baterije. Nosivost je maksimalno 450 kg. Ručno se staklo može okretati za 360 ° oko svoje ose i ležati za 90 °. Radi sa 12-voltnom baterijom. Dimenzije stakla su između 850 x 1250 i 2500 x 4000 mm. Težina mašine je 55,3 kg. Nosivost staze je 800 kg. Ima mehanizam za automatsko zaključavanje i oslobađanje. Snimke sa obe strane. Maksimalna debljina koja se može uhvatiti: 20 mm. Težina aparata: 31 kg. Za ostale vakumske podizake i staze pitajte.



Tube Bending Machines - Mašine za savijanje i utiskivanje cevi

35 Three Roll Pipe And Tube Bending Machine 35 mašina za savijanje cevi i profila sa tri valjka



Shift Diameters	Prečnik valjka	50 mm
Roll Diameters	Prečnici kotra	155 mm
Working Speed	Radna brzina	4,5 m./min
Engine Power	Snaga motora	1,5 kW
Weight	Težina	400 kg
Width	Širina	850 mm
Length	Dužina	1100 mm
Height	Visina	1500 mm

32 E Pipe And Tube Bending Machine 32E mašina za savijanje cevi




Max. Pipe Diameter	Maks. Prečnik cevi	32 mm
Max. Wall Thickness	Max. deb. zidova	3 mm
Max. Bending Radius	Max. radius sav.	275 mm
Max. Bending Angle	Max. stepen sav.	(°) - 190
Hydraulic Engine Power	Snaga hidr. mot.	1,5 kW
Bending Engine Power	Snaga sav. mot.	2,2 kW
Dimensions (LxWxH)	Dimenzija (DxŠxV)	2000-1000-1050 mm
Weight	Težina	400 kg

Line for Production of Panel Doors Linija za proizvodnju panelnih vrata

Thermoform Machine Thermoform mašina



Sizing Machine Mašina za dimenzioniranje



Cold Press Hladna presa



- Thermoform Machine with one or two stations
- Cold Press Machine with one – two or three stations
- Cutter Place for Glass Places
- Door Sizing Machine
- Glue Application Machine
- Consists of these machines

- Termoform mašina sa jednom ili dvije stanice
- Mašina za hladnu presu sa jednom - dve ili tri stanice
- Mašina za rezanje za staklenih mesta
- Mašina za dimenzioniranje vrata
- Mašina za nanošenje lepila
- Sastoji se od ovih mašina

Single Head Cutting Machine for Wide profiles Jednoglavi ger za sečenje šire ALU i PVC profila

Weight	Težina	250 kg
Lenght	Dužina	4000 mm
Width	Širina	1600 mm
Height	Visina	1200 mm
Air Pressure	Pritisak vazduha	6-8 Bar
Air Consuption	Potrošnja vazduha	20 l/min.
Voltage & Frequency	Napon i frekvencija	380 V/A 50 Hz
Total Power	Ukupna snaga	2.2 kW
Saw Diametar	Dijametar testera	400 mm

Professional Single Head Welding Machine 200 mm Profesionalna jednoglava varilica 200 mm

Weight	Težina	195 kg
Lenght	Dužina	750 mm
Width	Širina	744 mm
Height	Visina	1714 mm
Air Pressure	Pritisak vazduha	6-8 Bar
Air Consuption	Potrošnja vazduha	17 l/min.
Voltage & Frequency	Napon i frekvencija	220 V/A 50 Hz
Total Power	Ukupna snaga	1.5 kW
Max. Height of Profile	Max. visina profila	200 mm

Copy Router for Aluminium Pantograf kopirka za aluminijum

Weight	Težina	90 kg
Lenght	Dužina	750 mm
Width	Širina	1250 mm
Height	Visina	1500 mm
Air Pressure	Pritisak vazduha	6-8 Bar
Air Consuption	Potrošnja vazduha	5 l/min.
Voltage & Frequency	Napon i frekvencija	380 V/A 50 Hz
Total Power	Ukupna snaga	3 kW

Automatic Water Slot Drilling Machine Automatska mašina za otvaranje drenaže

Weight	Težina	90 kg
Lenght	Dužina	825 mm
Width	Širina	653 mm
Height	Visina	1510 mm
Air Pressure	Pritisak vazduha	6-8 Bar
Air Consuption	Potrošnja vazduha	5 l/min.
Voltage & Frequency	Napon i frekvencija	380 V/A 50 Hz
Total Power	Ukupna snaga	1.65 kW

Manual Double Head Cutting Machine 400 mm Manuelni dvoglavi ger 400 mm

Weight	Težina	410 kg
Lenght	Dužina	4145 mm
Width	Širina	1130 mm
Height	Visina	1535 mm
Air Pressure	Pritisak vazduha	6-8 Bar
Air Consuption	Potrošnja vazduha	46 l/min.
Voltage & Frequency	Napon i frekvencija	380 V/A 50 Hz
Total Power	Ukupna snaga	4.5 kW
Saw Diametar	Dijametar testera	400 mm

Roller Shutter Machines Mašine za roletne



- Roller Shutter Box & Roller Shutter Profile Cutting Machine
- Roller Shutter Caps Locking Machine
- Roller Shutter Side Guide Milling Machine
- Roller Shutter Assembly Table & Test Machine
- Isolated Roller Shutter Box Cutting Machine
- Sorter Machine for Caps
- Mašina za Sečenje Roletne Lamele i Kutije
- Mašina za Zatvaranje Roletne
- Mašina za Obradu Stranične Vodiče
- Stol za Montaže Roletne i Mašina za Testiranje
- Mašina za Sečenje Kutije za Roletne sa Izolacijom
- Mašina za Avtomatsko Punjenje Čepa


Portable Machines, Hand Tools and Spare parts for PVC, Aluminium and Glass Sector Portabl mašine, ručni alati i rezervni delovi za PVC i ALU stolariju i za staklo



Portable End Milling Machine
Portabl mašina za T-Prečku



Portable Drilling Machine
Portabl pantograf kopirka



Pneumatic Surface Cleaning
Pneumatski alat za površinsko čišćenje



Mechanic Surface Cleaning
Manuelni alat za površinsko čišćenje



Corner Cleaning Tools Machine
Alat za stranično čišćenje



Hotmelt Pistol
Hotmelt pištolj



Barrel Jacket
Džeket za bure



Thiokol Pistol
Pištolj za tiokol

Second Hand Machines for PVC, Aluminium and Glass Sector From Premium Brands Polovne mašine za PVC i aluminijumsku stolariju i mašine za staklo vrhunskih brendova

Tel: +90 216 344 3 344

www.tehplastgroup.com • techplastgroup@gmail.com • info@tehplastgroup.com